



BSC-1DAY-04

Rounded pouch with flower initial

8 cm (height) × 26-28 cm (width) Finished size / 3.1 in (height) \times 10.2-11 in (width)

Materials

Stabilizer

Zipper

Ribbon

Outside fabric (Liberty)

Inside fabric (solid color)

 $50 \text{ cm} / 19.7 \text{ in} \times 54 \text{ cm} / 21.3 \text{ in} - 1 \text{ piece}$ $50 \text{ cm} / 19.7 \text{ in} \times 35 \text{ cm} / 13.8 \text{ in} - 1 \text{ piece}$

 $45 \text{ cm} / 17.7 \text{ in} \times 54 \text{ cm} / 21.3 \text{ in} - 1 \text{ piece}$

30 cm/ 11.8 in - 1

8 cm/3.1 in - 1 piece

 $3 \text{ cm} / 1.2 \text{ in} \times 4 \text{ cm} / 1.6 \text{ in} - 1 \text{ piece}$ Tab fabric


Appliqué fabric Cutout - 1 piece


15 mm / 0.6 in (width) - 1D-ring

 $20 \text{ cm} / 7.9 \text{ in} \times 18 \text{ cm} / 7.1 \text{ in} - 1 \text{ piece}$ Embroidery stabilizer

Pattern 1 sheet

- ① Cut the stabilizer (A) in the following order. (opening \rightarrow decorative tab \rightarrow outside) Cut out the pieces from the outside fabric (B) and inside fabric (C). Affix the cut pieces of A to the indicated fabric pieces.
- ② Affix embroidery stabilizer to the body pieces of the outside fabric, and then sew the appliqué embroidery. (Center the embroidery on the mark in the pattern.) Position the appliqué data, then the embroidery for the initial. (Edit the embroidery.) Skipping the first color so that the cutting line will not be sewn, start embroidery with the second color.
- 3 Cut out the fabric to the shapes of the patterns. Sew darts in the outside fabric and inside fabric for the body. (Sew lockstitch at the end of stitching.)





(4) Make a decorative tab for the D-ring. Press the 3 cm/ 1.2 in x 8 cm/ 3.1 in piece of the outside fabric, place the ribbon on top, and then sew together the two ends. After sewing, fold in half, feed through the D-ring, and then baste.



Make a decorative zipper slider. Fold in both sides of the 4 cm/ 1.6 in x 12 cm/ 4.7 in piece of the outside fabric to create 1-cm-wide tape/0.4 in wide tape.

(5) Make pieces for the zipper.

Mark 1 cm/0.4 in from each end of the cut inside fabric (2 pieces with stabilizer affixed and 2 pieces with no stabilizer), and then fold one end to the wrong side. (4 pieces)





With right sides together, overlap with a piece with no stabilizer, and then sew around the edge. Sew the tab fabric to the end of the zipper.


* Adjust the finished width to 23 cm/9.1 in or less.


® Temporarily secure the D-ring piece made in step @ and the zipper pieces made in step ® to the outside fabric for the body.

Overlap with the inside fabric for the body, and then sew with a 1 cm/ 0.4 in seam allowance. Make both the front and back sides. Fold the seam allowances toward the inside fabric, and then sew around the edge, leaving an opening at the bottom of the inside in order to turn right side out. Turn right side out through the opening, and then reshape.







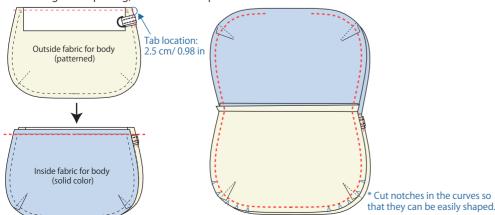

(7) Sew around the opening. The zipper may stick out or be pushed inside of the pouch.

